


Ferrofix upper section Sys125, Gl fl., Slot cover, 146x146 mm

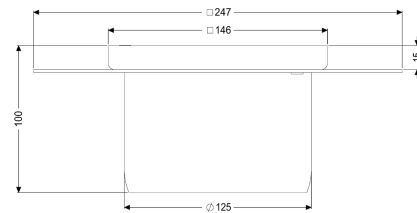

Article information

Item no.: 54919
 GTIN: 4026092072424
 Price group: 70

Advantages

- Made of a particularly hygienic and mechanically highly resistant stainless steel
- Multiple combinations with suitable drain bodies

Description

Used in combination with a drain body of the KESSEL modular system 125, the stainless steel upper section is suitable for indoor point drainage. The upper section is suitable for thin-layered floorings (e.g. epoxy resin) and has a circumferential adhesive joint edge (15 mm deep and 50 mm folded outwards).

Variant

System:	125
Waterproofing layer on the upper section:	Adhesive flange (suitable for moisture barriers)

General characteristics

ATEX:	no
-------	----

Dimensions

Net weight:	2,09 kg
Gross weight:	2,09 kg
Length:	246 mm
Width:	246 mm
Height:	100 mm
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height

Coverage features

Type of cover:	Slotted cover
----------------	---------------

Cover material:	Stainless steel 14301
Height of cover:	15 mm
Surface:	Polished SST
Locking:	screwed
Load class:	K 3 (EN 1253-1)
Rim width:	146 mm
Rim length:	146 mm
Shape of upper section:	square
Upper section material:	Stainless steel 14301