


## Ferrofix upper section Sys125, Gl fl., Slot cover, 146x146 mm

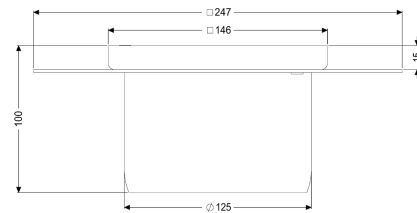

### Article information

Item no.: 54919  
 GTIN: 4026092072424  
 Price group: 70

### Advantages

- Made of a particularly hygienic and mechanically highly resistant stainless steel
- Multiple combinations with suitable drain bodies

### Description

Used in combination with a drain body of the KESSEL modular system 125, the stainless steel upper section is suitable for indoor point drainage. The upper section is suitable for thin-layered floorings (e.g. epoxy resin) and has a circumferential adhesive joint edge (15 mm deep and 50 mm folded outwards). Including the "Easy Open" function in the odour trap in the upper section

#### Variant

|   |  |
|---|--|
| System:                                   | 125  |
| Waterproofing layer on the upper section: | Adhesive flange (suitable for moisture barriers) |

#### Dimensions

|                      |         |
|----------------------|---------|
| Net weight:          | 2,09 kg |
| Gross weight:        | 2,09 kg |
| Length:              | 246 mm  |
| Width:               | 246 mm  |
| Height:              | 100 mm  |
| Packaging dimension: | length  |
| Packaging dimension: | width   |
| Packaging dimension: | height  |

#### Coverage features

|                  |                       |
|------------------|-----------------------|
| Type of cover:   | Slotted cover         |
| Cover material:  | Stainless steel 14301 |
| Height of cover: | 15 mm                 |

|                         |                       |
|-------------------------|-----------------------|
| Surface:                | Polished SST          |
| Locking:                | screwed               |
| Load class:             | K 3 (EN 1253-1)       |
| Rim width:              | 146 mm                |
| Rim length:             | 146 mm                |
| Shape of upper section: | square                |
| Upper section material: | Stainless steel 14301 |