
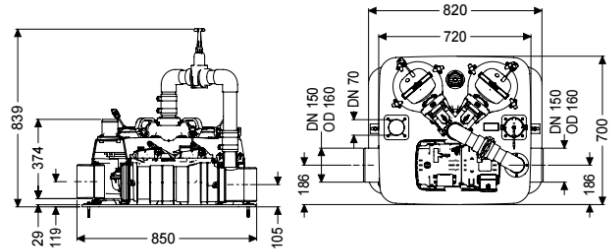


## Hybrid lifting station Ecolift L Duo, FKA, exposed, SPF 1350-S3



### Article information

Item no.: 22007  
 GTIN: 4026092105856  
 Price group: 20

### Advantages

- Hybrid function: uses the natural fall to the sewer - pump is only used in case of backwater
- Quiet and energy-saving
- Tool-free maintenance

### Description

The alternative to a sewage lifting station. For faecal wastewater, bottom section made of PE-LD, for installation in an exposed drainage pipe, drainage via the gravity pipe to the sewer. Lifting function with one pump or two pumps, only in the event of backwater, the backwater flap can be closed by a motor, with an additional hinged flap. During the backwater phase the wastewater drains via connectable integrated pressure pipe. Including a backflow preventer and shut-off valve for the pressure pipe. Including penetration seals DN 70 for the on-site ventilation pipe Polymer closure system for the drainage pipe for safe closure of the drainage pipe in the event of backwater. Consisting of a hinged flap including an emergency closure (for manual locking if required) and an electrically powered closure mechanism including a probe protected against wire breakage for the detection of backwater. Control units with an integrated self-diagnosis system (SDS), display of the operating states and integrated battery back-up for alarm signals. User-friendly menu guidance in a multi-line display. With a self-diagnosis system (SDS) and reminder when maintenance is due. Display of the current measured values. Simple adjustment of the function-related parameters, including the operating hour counter and potential-free contact. Optional relaying of alarm and collective error messages via the GSM interface. Control unit with a full text display in six languages.

#### General characteristics

Colour:	black
Type of wastewater:	with sewage
Installation situation:	exposed drainage pipe

Approval:	Z-53.2-493
Type de protection moteur:	IP 68
Cable length:	1 m
ATEX:	no
Dimensions	
Net weight:	50,47 kg
Gross weight:	76,19 kg
Length:	700 mm
Width:	850 mm
Height:	839 mm
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height
Tank/drain body	
Pressure pipe connection (DN):	50
Pressure pipe connection (OD):	63 mm
Outlet nominal size (DN):	150 mm
Pumping volume:	20 l
Wastewater contents	
Total volume:	66 l
Pumping device	
Pump:	SPF 1350
Number of pumps:	2
Rated current:	6 A
Protection class (pump):	IP 68 (3m/48h)
Max. pumping capacity:	26 m <sup>3</sup> /h
Max. pumping height:	10 m
Power P1:	1,35 kW
Power P2:	0,86 kW
Operating mode:	S3 - 50 %
Type of fuse required (electrical protection):	C 16 A
Impeller type:	Multi-vane impeller
Free passage:	40 mm
Control	
Control unit:	Comfort
Level measurement instrument:	Immersion pipe
Type of level measurement:	pneumatic
Mains frequency:	50 Hz
Operating voltage:	230 V
Rated current:	6 A
Type of fuse required (electrical protection):	C 16 A