


## Backwater pump station, Pumpfix F DN 125, Floor slab, tileable

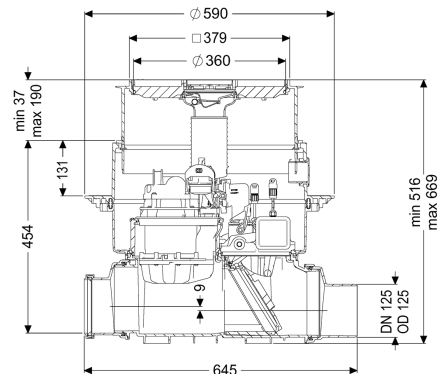

### Article information

Item no.: 24125X  
 GTIN: 4026092046555  
 Price group: 30

### Advantages

- Backwater pumping station: uses the natural fall to the sewer - pump is only used for backwater
- Flexible installation, different covers with drain function available for installation in the floor slab
- Quiet and energy-saving

### Description

The premium backwater pumping station for faecal and non-faecal wastewater is equipped with a pump and a motor-driven closure system. The pipe cross-section is normally open. In case of backwater, the motor-driven closure system is closed automatically. During the backwater phase, the water drains via the pump with integrated macerator. The station is controlled by a user-friendly control unit, which is optionally integrated in the building management system via a potential-free contact, or alarm and collective fault messages can be output via a GSM interface.

#### Variant

|                               |                |
|-------------------------------|----------------|
| Emergency closure:            | yes            |
| Pump control:                 | Control unit   |
| Protection class, probe:      | IP 68 (3m/48h) |
| Motor-driven backwater flaps: | 1              |

#### General characteristics

|                         |                         |
|-------------------------|-------------------------|
| Colour:                 | black                   |
| Nominal size (DN):      | 125                     |
| Outer diameter (OD):    | 125 mm                  |
| Type of wastewater:     | with sewage             |
| Installation situation: | floor slab installation |

|  |  |
|--|--|
| Delivery state:  | Pre-mounted for final assembly on site (pumps and sensor system must be fitted on site and control unit must be connected) |
| Approval:  | Z-53.2-388   |
| Motor type:  | KSM 140  |
| Type de protection moteur:                             | IP 68 (3m/48h)   |
| <b>Dimensions</b>                                      |  |
| Net weight:  | 30,2 kg  |
| Gross weight:  | 33 kg  |
| Groundwater resistant from lower edge of base section: | 3000 mm  |
| Cutout dimension, width:                               | 750 mm   |
| Cutout dimension, length:                              | 750 mm   |
| Vertical drop between inlet and outlet:                | 9 mm   |
| Installation depth:                                    | 516 - 669 mm   |
| Type of height adjustability:                          | vertically adjustable upper section  |
| Length:  | 645 mm   |
| Width:   | 590 mm   |
| Packaging dimension:                                   | length   |
| Packaging dimension:                                   | width  |
| Packaging dimension:                                   | height   |
| <b>Tank/drain body</b>                                 |  |
| Socket version:  | including spigot and socket  |
| <b>Coverage features</b>                               |  |
| Type of cover:   | tileable cover plate   |
| Cover material:  | Polymer  |
| Width of cover:  | 366 mm   |
| Length of cover:                                       | 366 mm   |
| Drainage function:                                     | yes  |
| Locking:   | Lock & Lift  |
| Load class:  | K 3 (EN 1253-1)  |
| Max. flooring height:                                  | 16 mm  |
| Odour trap:  | Multistop  |
| <b>Pumping device</b>                                  |  |
| Pump:  | SPZ 1000   |
| Number of pumps:                                       | 1  |
| Weight, pump:  | 10 kg  |
| Connection type:                                       | coded plug   |
| Rated current:   | 5,2 A  |
| Length of mains cable for pump:                        | 5 m  |
| Protection class:                                      | I  |
| Insulation class:                                      | F  |
| Cos phi - power factor:                                | 0,97   |
| Protection class (pump):                               | IP 68 (3m/48h)   |
| Temperature monitoring:                                | integrated   |

|  |   |
|--|---|
| Max. temperature (permanent) of conveyed material: | 40 °C   |
| Max. pumping capacity:                             | 11,5 m <sup>3</sup> /h  |
| Max. pumping height:                               | 10 m  |
| Speed:   | 2800 U/min  |
| Power P1:  | 1,2 kW  |
| Power P2:  | 0,69 kW   |
| Operating mode:                                    | S3 - 50 %   |
| Type of fuse required (electrical protection):     | C 16 A  |
| Type of pump connection cable:                     | H07RN-F 3G 1.5 mm <sup>2</sup>                                |
| Impeller type:                                     | Macerator   |
| Motor connection cable type:                       | ÖPVC-JB/OB 300/500 V/3 x 0,75 mm <sup>2</sup> mm <sup>2</sup> |
| Sensor connection cable type:                      | ÖPVC-JB/OB 300/500 V/3 x 0,75 mm <sup>2</sup> mm <sup>2</sup> |
| <br>   |   |
| Control  |   |
| Control unit:                                      | Comfort   |
| Alarm sensor:                                      | optical probe   |
| Level measurement instrument:                      | optical probe   |
| Type of level measurement:                         | optical   |
| Protection class control unit:                     | IP 54   |
| Operating voltage:                                 | 230 V   |
| Connection type:                                   | coded plug  |
| Length of mains cable for control unit:            | 1,4 m   |
| Potential-free contact:                            | optional  |
| GSM interface:                                     | yes   |
| USB interface:                                     | yes   |
| Log book function:                                 | yes   |
| Multi-line display:                                | yes   |
| Battery buffering:                                 | yes   |
| Self-diagnosis system (SDS):                       | yes   |
| Rated current:                                     | 5,2 A   |