
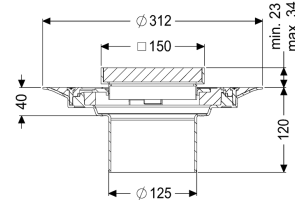


## Variofix upper section Slotted grating, 304 SST, L 15

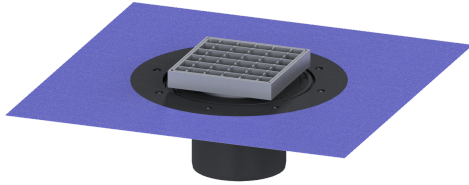

### Article information

Item no.: 48965  
 GTIN: 4026092004708  
 Price group: 70

### Advantages

- Different covers selectable
- Including waterproofing membrane

### Description

Used in combination with a drain body of the KESSEL modular system, the upper section is suitable for indoor point drainage.

#### Variant

Seal:

Lip seal

Waterproofing layer on the upper section:

Enclosed sealing collar to be glued (bd) according to DIN 18534

Water exposure class in accordance to DIN 18534-1 (up to and including):

W3-I

#### General characteristics

ATEX:

no

#### Dimensions

Vertical adjustment:

23 - 40 mm

Net weight:

2,4 kg

Gross weight:

2,64 kg

Diameter:

312 mm

Type of height adjustability:

vertically adjustable upper section

Height:

120 mm

Packaging dimension:

length

Packaging dimension:

width

Packaging dimension:

height

#### Coverage features

Type of cover:	Slotted cover
Cover material:	Stainless steel 14301
Colour of cover:	silver
Surface:	pickled
Frame material:	Stainless steel 14301
Locking:	placed
Load class:	L 15 (EN 1253-1)
Grating design:	Cross
Rim width:	150 mm
Rim length:	150 mm
Upper section:	adjustable in three dimensions
Shape of upper section:	square
Upper section material:	ABS
Mesh size:	23 x 23 mm