



Ferrofix drain body, glued flange Sys 125, DN 70, horizontal outlet

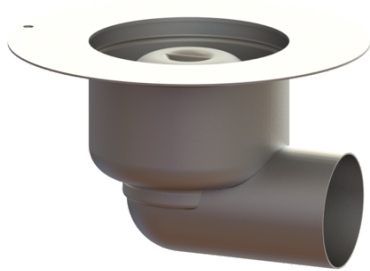

Article information

Item no.: 54300
GTIN: 4026092072349
Price group: 70

Advantages

- Made of particularly hygienic and mechanically highly resistant stainless steel
- Variably combinable with upper sections

Description

In combination with a System 125 upper section, the Ferrofix stainless steel drain body is used for point drainage and is equipped with a removable odour trap and a temporary protective cover. The glued flange with a flange width of 50 mm is suitable for joint sealings in accordance with DIN 18534, for all waterproofing classes. The outlet socket is suitable for connection to SML cast iron pipes. Separate equipotential bonding is not necessary.

Variant

System:	125
Waterproofing layer on the drain body:	Adhesive flange (suitable for moisture barriers)
Sealing water height:	50 mm

General characteristics

Standard:	EN 1253-1
Nominal size (DN):	70
Outer diameter (OD):	78 mm

Dimensions

Net weight:	1,3 kg
Gross weight:	1,58 kg
Length:	240 mm
Width:	240 mm
Height:	147 mm
Packaging dimension:	length
Packaging dimension:	width

Packaging dimension:	height
Tank/drain body	
Number of outlets:	1
Material of drain body:	Stainless steel 14301
Socket version:	lateral
Coverage features	
Odour trap:	included