


Ferrofix upper section Sys200, slot grat, 304SST, 300 x 300 mm

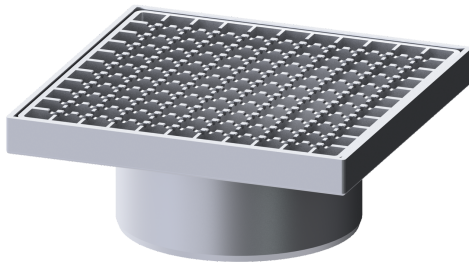

Article information

Item no.: 57415
 GTIN: 4026092010471
 Price group: 70

Advantages

- Made of a particularly hygienic and mechanically highly resistant stainless steel
- Multiple combinations with suitable drain bodies.

Description

Used in combination with a drain body of the KESSEL modular system 200, the stainless steel upper section is suitable for indoor point drainage.

Variant
 System: 200
 Note on installation depth: For load class M 125, on-site shimming necessary

General characteristics
 ATEX: no

Dimensions
 Net weight: 7,97 kg
 Gross weight: 8,48 kg
 Length: 300 mm
 Width: 300 mm
 Height: 115 mm
 Packaging dimension: length
 Packaging dimension: width
 Packaging dimension: height

Coverage features
 Type of cover: Slotted cover
 Cover material: Stainless steel 14301
 Width of cover: 282 mm
 Height of cover: 28 mm
 Length of cover: 282 mm
 Surface: pickled
 Locking: unscrewed
 Load class: M 125 (EN 1253-1)
 Upper section material: Stainless steel 14301

Mesh size:

23 x 23 mm