


Replacement pump SPF 400 KE 4.0 kW

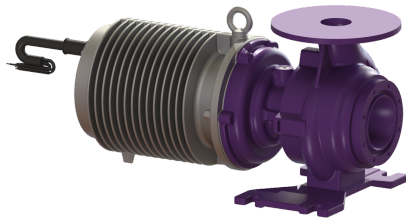

Article information

Item no.: 680331
 GTIN: 4026092067895
 Price group: 90

Description

Homogeniser pump for grease separators

Variant

Pump control: Control unit

Dimensions

Net weight: 42,4 kg
 Gross weight: 42,4 kg
 Packaging dimension: length
 Packaging dimension: width
 Packaging dimension: height

Pumping device

Pump: SPF 400 KE
 Weight, pump: 42,4 kg
 Connection type: Direct connection
 Operating voltage: 400 V
 Mains frequency: 50 Hz
 Rated current: 7,9 A
 Protection class: I
 Insulation class: F
 Protection class (pump): IP 68 (3m/48h)
 Temperature monitoring: integrated
 Max. temperature (permanent) of conveyed material: 35 °C
 Max. pumping height: 16 m
 Speed: 2900 U/min
 Power P1: 4,2 kW
 Power P2: 3,5 kW
 Operating mode: S2 - 50 min.
 Type of fuse required (electrical protection): Fuse protection through control unit 400 V
 Type of pump connection cable: H07RN-F 7G 1.5 mm²
 Impeller type: Radial impeller with macerating system

Length of mains cable for pump:

5 m

Control

Connection type:

Direct connection

Type of fuse required (electrical protection):

Fuse protection through control unit 400 V