


Backwater valve Staufix DN 200, exposed, Type 2

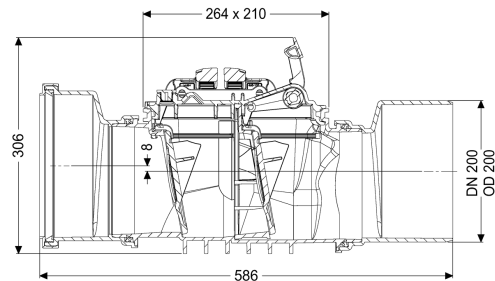

Article information

Item no.: 730200
 GTIN: 4026092076538
 Price group: 10

Advantages

- Optional rat protection flap for additional safety
- Flexible installation, various covers available for floor slab installation
- Alternatively available as a module set

Description

The backwater valve for wastewater without sewage is equipped with two mechanical flaps which close automatically in the event of backwater. One flap serves as an emergency closure to be closed by hand. Thanks to the modular KESSEL system, existing systems can easily be converted to the StaufixControl backwater valve.

Variant

| | |
|---|-----|
| Stainless steel flap as rat protection: | no |
| Emergency closure: | yes |
| Mechanical backwater flaps: | 2 |

General characteristics

| | |
|-------------------------|---------------------------------|
| Colour: | black |
| Standard: | EN 13564 |
| Nominal size (DN): | 200 |
| Outer diameter (OD): | 200 mm |
| Note on nominal size: | Hydraulics correspond to DN 150 |
| Type of wastewater: | without sewage |
| Installation situation: | exposed drainage pipe |
| Delivery state: | installation-ready |
| Backwater protection: | Type 2 |

Dimensions

| | |
|-------------|---------|
| Net weight: | 3,75 kg |
|-------------|---------|

| | |
|---|--------------------|
| Gross weight: | 4,66 kg |
| Vertical drop between inlet and outlet: | 8 mm |
| Length: | 586 mm |
| Width: | 233 mm |
| Height: | 306 mm |
| Packaging dimension: | length |
| Packaging dimension: | width |
| Packaging dimension: | height |
| Coverage features | |
| Type of cover: | Lockable cover |
| Cover locking: | One-handed closure |