


Replacement pump SPF 300 KE 2.0 Homogeniser, 3,0 kW

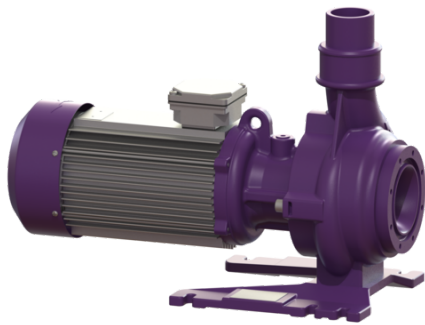

Article information

Item no.: 917856
GTIN: 4026092055823
Price group: 90

Description

Dimensions

Net weight:	55,5 kg
Gross weight:	57 kg
Packaging dimension:	length
Packaging dimension:	width
Packaging dimension:	height

Pumping device

Pump:	SPF 300 KE 2.0
Connection type:	Direct connection
Rated current:	6,2 A
Length of mains cable for pump:	5 m
Protection class:	I
Protection class (pump):	IP 55
Temperature monitoring:	integrated
Max. temperature (permanent) of conveyed material:	35 °C
Max. pumping height:	17 m
Speed:	2850 U/min
Power P1:	3,6 kW
Power P2:	3 kW
Operating mode:	S2 - 30 min.
Type of fuse required (electrical protection):	Fuse protection through control unit 400 V
Type of pump connection cable:	H07RN-F 7G 1.5 mm ²
Impeller type:	Radial impeller with macerating system

Control

Mains frequency:	50 Hz
Operating voltage:	400 V
Connection type:	Direct connection
Rated current:	6,2 A