


## Comfort control unit 400V, Aqualift Mono, 4.0-6.3 A

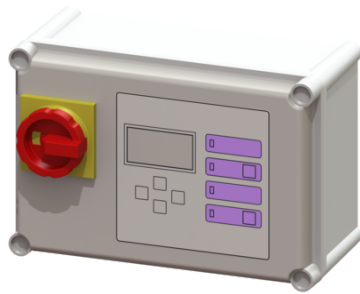

### Article information

Item no.: 28756  
 GTIN: 4026092055014  
 Price group: 20

### Advantages

- Self-diagnosis system (SDS)
- Potential-free contact for faults/warnings
- Reminder for when maintenance is due

### Description

Comfort control unit suitable for 400V single stations. User-friendly menu navigation in multi-line display. With self-diagnosis system (SDS) and reminder when maintenance is due. Display of the current measured values. Easy setting of the function-relevant parameters, operating hours counter. Optional forwarding of alarm and collective fault messages via GSM interface.

#### Variant

Series: ab 03/2010  
 Type of system: Single unit

#### General characteristics

Colour: grey  
 System type: Mono

#### Dimensions

Net weight: 2,47 kg  
 Gross weight: 3,19 kg  
 Packaging dimension: length  
 Packaging dimension: width  
 Packaging dimension: height

#### Pumping device

Rated current: 4 - 6,3 A

#### Control

Control unit: Comfort  
 Motor protection switch: yes  
 Protection class control unit: IP 54  
 Potential-free contact: yes  
 GSM interface: yes  
 USB interface: no

Log book function:	yes
Multi-line display:	yes
Battery buffering:	yes
Self-diagnosis system (SDS):	yes
Rated current:	4 - 6,3 A