


## Pumping station Aquapump XL Tronic, SPF 1500-S3, D0

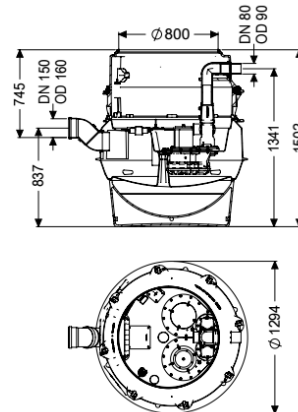

### Article information

Item no.: 8742013  
 GTIN: 4026092069493  
 Price group: 60

### Advantages

- Maximum safety
- Flexible installation
- Hygienic advantages for maintenance and repair

### Description

The pumping station for wastewater with and without sewage is equipped with one or two submersible pumps, a backflow preventer and a shut-off valve for the pressure pipe. The collection tank made of permanently resistant polymer (PE) has a closed pump tank (dry installation) with a screwed-on access cover. The station is controlled by a user-friendly control unit, which is optionally integrated in the building management system via a potential-free contact. Alternatively, alarm and collective fault messages can be output via a GSM interface. The KESSEL modular system provides different upper sections and engineering chamber options as accessories.

#### Variant

Note on installation depth:  
 Type of system:  
 Shut-off valve:  
 Access steps:  
 Installation:  
 Pump control:  
 Backflow preventer:  
 Pressure pipe connection:

Version with lowest installation height  
 Single unit  
 Shut-off valve made of polymer  
 yes  
 Dry installation  
 Control unit  
 integrated  
 horizontal

#### General characteristics

Colour: black  
 Standard: EN 12050-1  
 Type of wastewater: with sewage

|  |  |
|--|--|
| Installation situation:                                | underground installation   |
| Delivery state:  | Pre-mounted for final assembly on site (pumps and sensor system must be fitted on site and control unit must be connected) |
| System type:   | Tronic   |
| <b>Dimensions</b>                                      |  |
| Net weight:  | 177 kg   |
| Gross weight:  | 200 kg   |
| Groundwater resistant from lower edge of base section: | 3000 mm  |
| Length:  | 1295 mm  |
| Width:   | 1295 mm  |
| Height:  | 1500 mm  |
| Packaging dimension:                                   | length   |
| Packaging dimension:                                   | width  |
| Packaging dimension:                                   | height   |
| <b>Tank/drain body</b>                                 |  |
| Pressure pipe connection (DN):                         | 80   |
| Pressure pipe connection (OD):                         | 90 mm  |
| Venting connection (DN):                               | 70   |
| Distance from centre of outlet pipe to tank bottom:    | 1343 mm  |
| Distance pipe bottom inlet to tank bottom:             | 753 mm   |
| Distance from centre of inlet pipe to tank bottom:     | 833 mm   |
| Distance from inlet pipe invert to top of tank:        | 747 mm   |
| Inlet nominal size (OD):                               | 160 mm   |
| Inlet nominal size (DN):                               | 150 mm   |
| Number of inlets:                                      | 1  |
| Clear width of tank (LW):                              | 1000 mm  |
| Clear width of entry (LW):                             | 800 mm   |
| Pumping volume:  | 160 l  |
| Tank volume:   | 335 l  |
| <b>Pumping device</b>                                  |  |
| Pump:  | SPF 1500   |
| Number of pumps:                                       | 1  |
| Weight, pump:  | 24 kg  |
| Connection type:                                       | Direct connection  |
| Rated current:   | 2,7 A  |
| Length of mains cable for pump:                        | 10 m   |
| Protection class:                                      | I  |
| Insulation class:                                      | F  |
| Cos phi - power factor:                                | 0,77   |
| Protection class (pump):                               | IP 68 (3m/48h)   |
| Temperature monitoring:                                | integrated   |
| Max. temperature (permanent) of conveyed material:     | 40 °C  |

|                                |                                |
|--------------------------------|--------------------------------|
| Max. pumping capacity:         | 40 m <sup>3</sup> /h           |
| Max. pumping height:           | 8 m                            |
| Speed:                         | 1415 U/min                     |
| Power P1:                      | 1,4 kW                         |
| Power P2:                      | 1,1 kW                         |
| Operating mode:                | S3 - 50 %                      |
| Type of pump connection cable: | H07RN-F 7G 1.5 mm <sup>2</sup> |
| Impeller type:                 | Multi-vane impeller            |
| Free passage:                  | 40 mm                          |
| Control                        |                                |
| Control unit:                  | Comfort                        |
| Motor protection switch:       | yes                            |
| Alarm sensor:                  | Immersion pipe                 |
| Level measurement instrument:  | Immersion pipe                 |
| Type of level measurement:     | pneumatic                      |
| Protection class control unit: | IP 54                          |
| Operating voltage:             | 400 V                          |
| Connection type:               | Direct connection              |
| Potential-free contact:        | yes                            |
| GSM interface:                 | yes                            |
| Log book function:             | yes                            |
| Multi-line display:            | yes                            |
| Battery buffering:             | yes                            |
| Self-diagnosis system (SDS):   | yes                            |
| Rated current:                 | 2,7 A                          |